

# Schematic

## D11N Track-Type Tractor Electrical System EUI Engine Retrofit


74Z1-UP

This Schematic Is For The D11N Track Type Tractor With An EUI Engine Installed In A Non-EUI Machine. This Schematic Is Used With Special Instruction, SEHS9859, (EUI Retrofit).


© 1995 Caterpillar  
All Rights Reserved

Printed in U.S.A.


### Electrical Schematic Symbols And Definitions

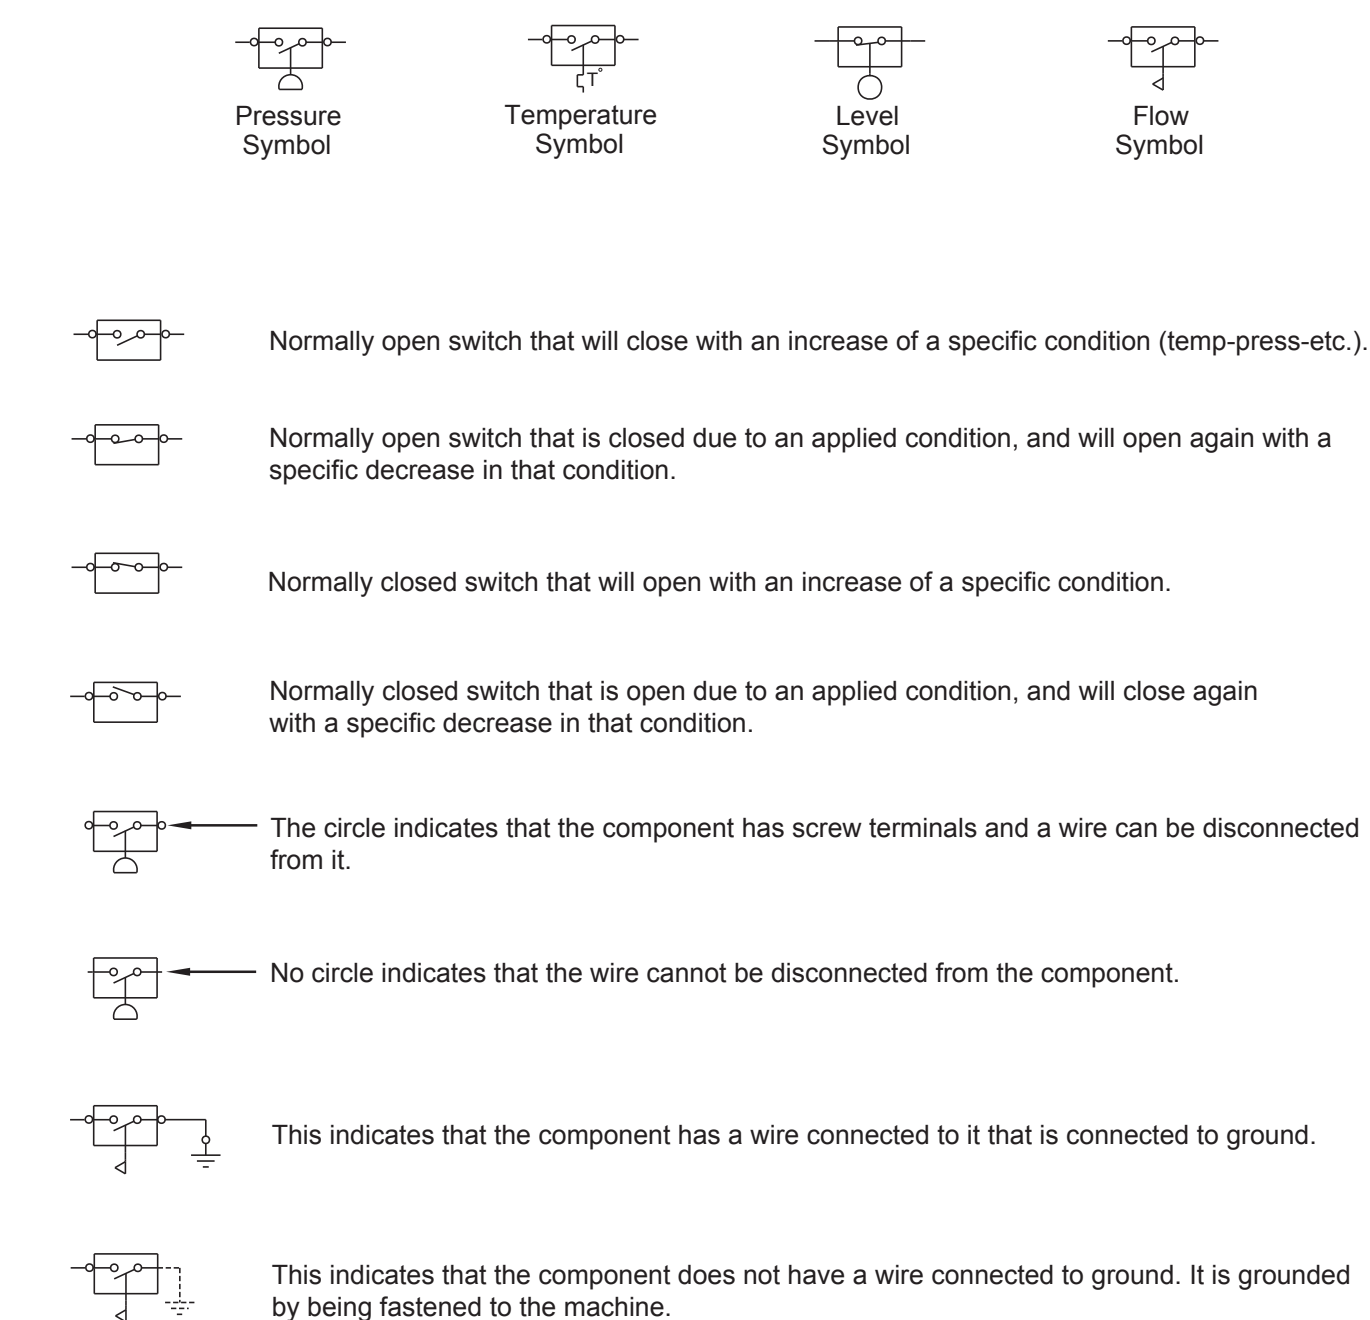


### Harness And Wire Electrical Schematic Symbols

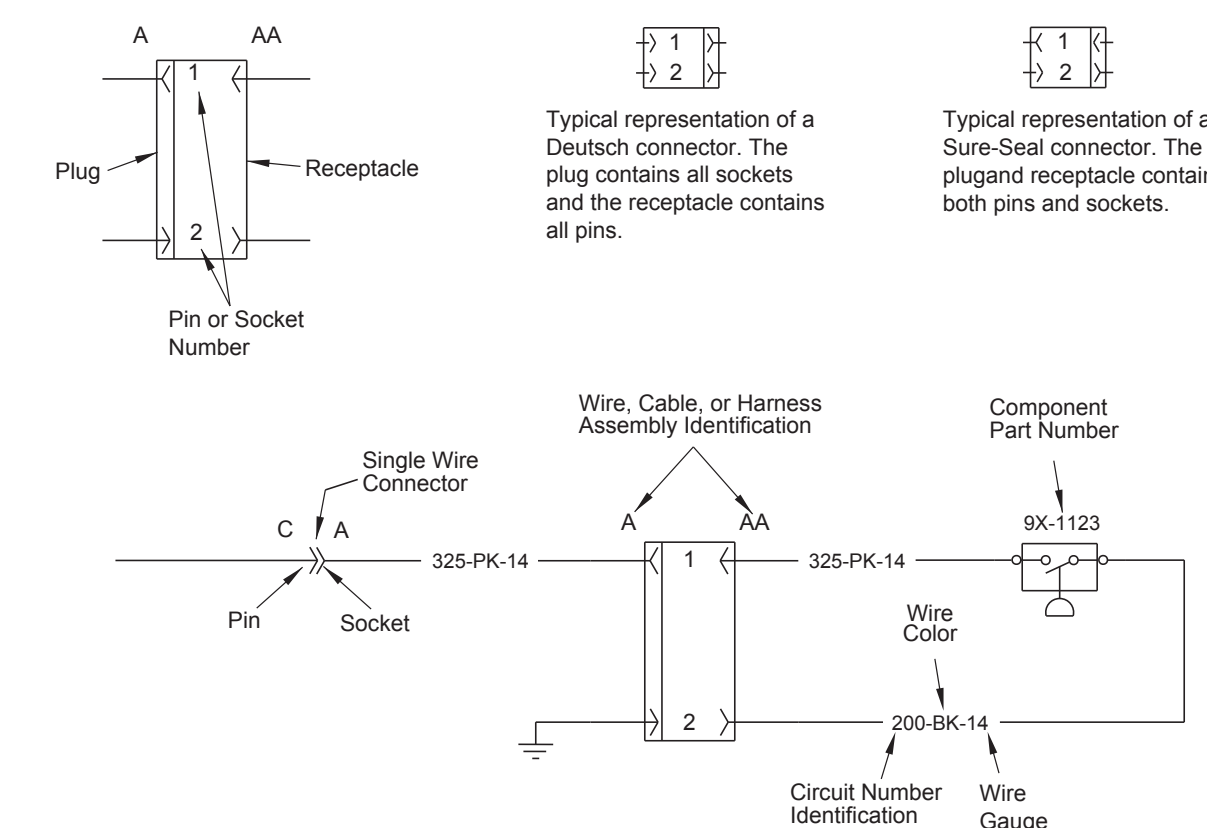

### Electrical Schematic Symbols And Definitions

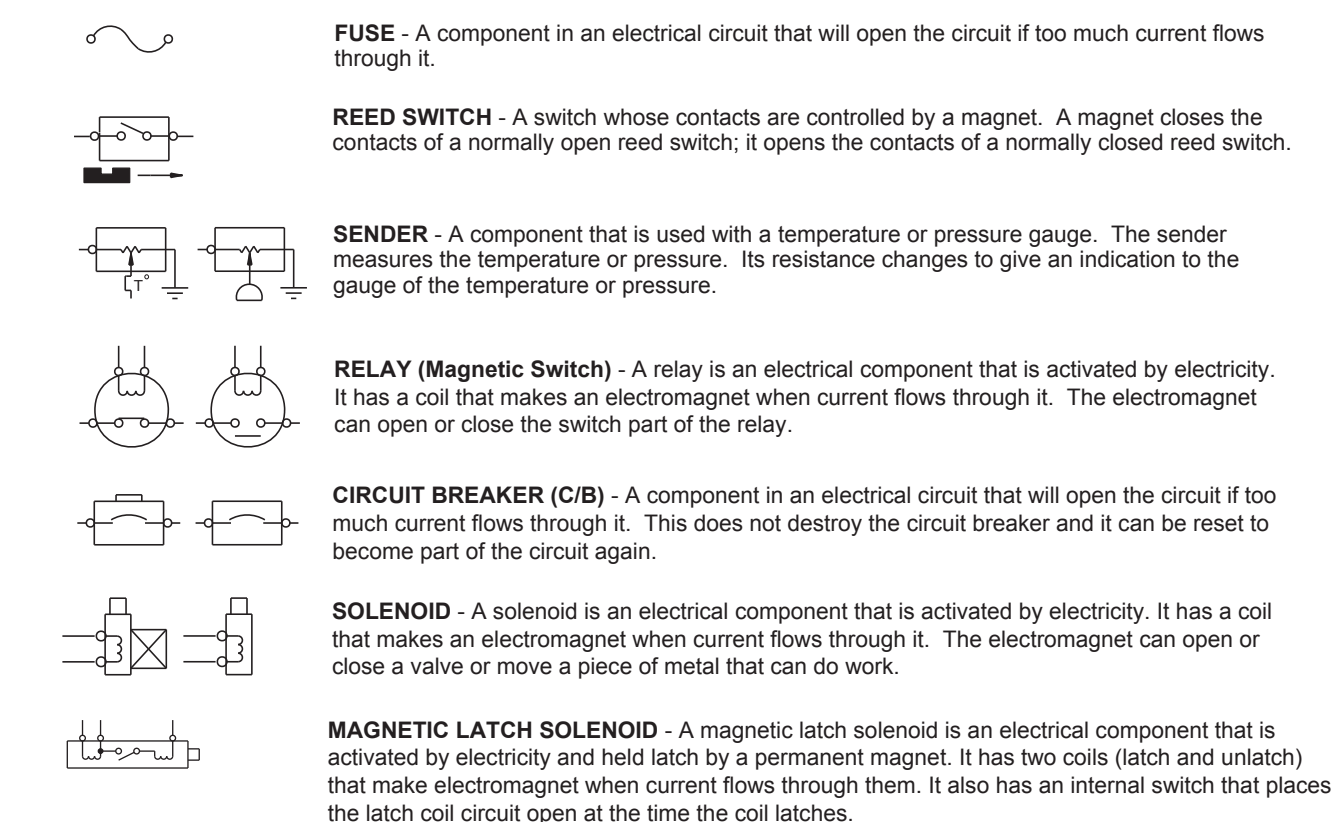

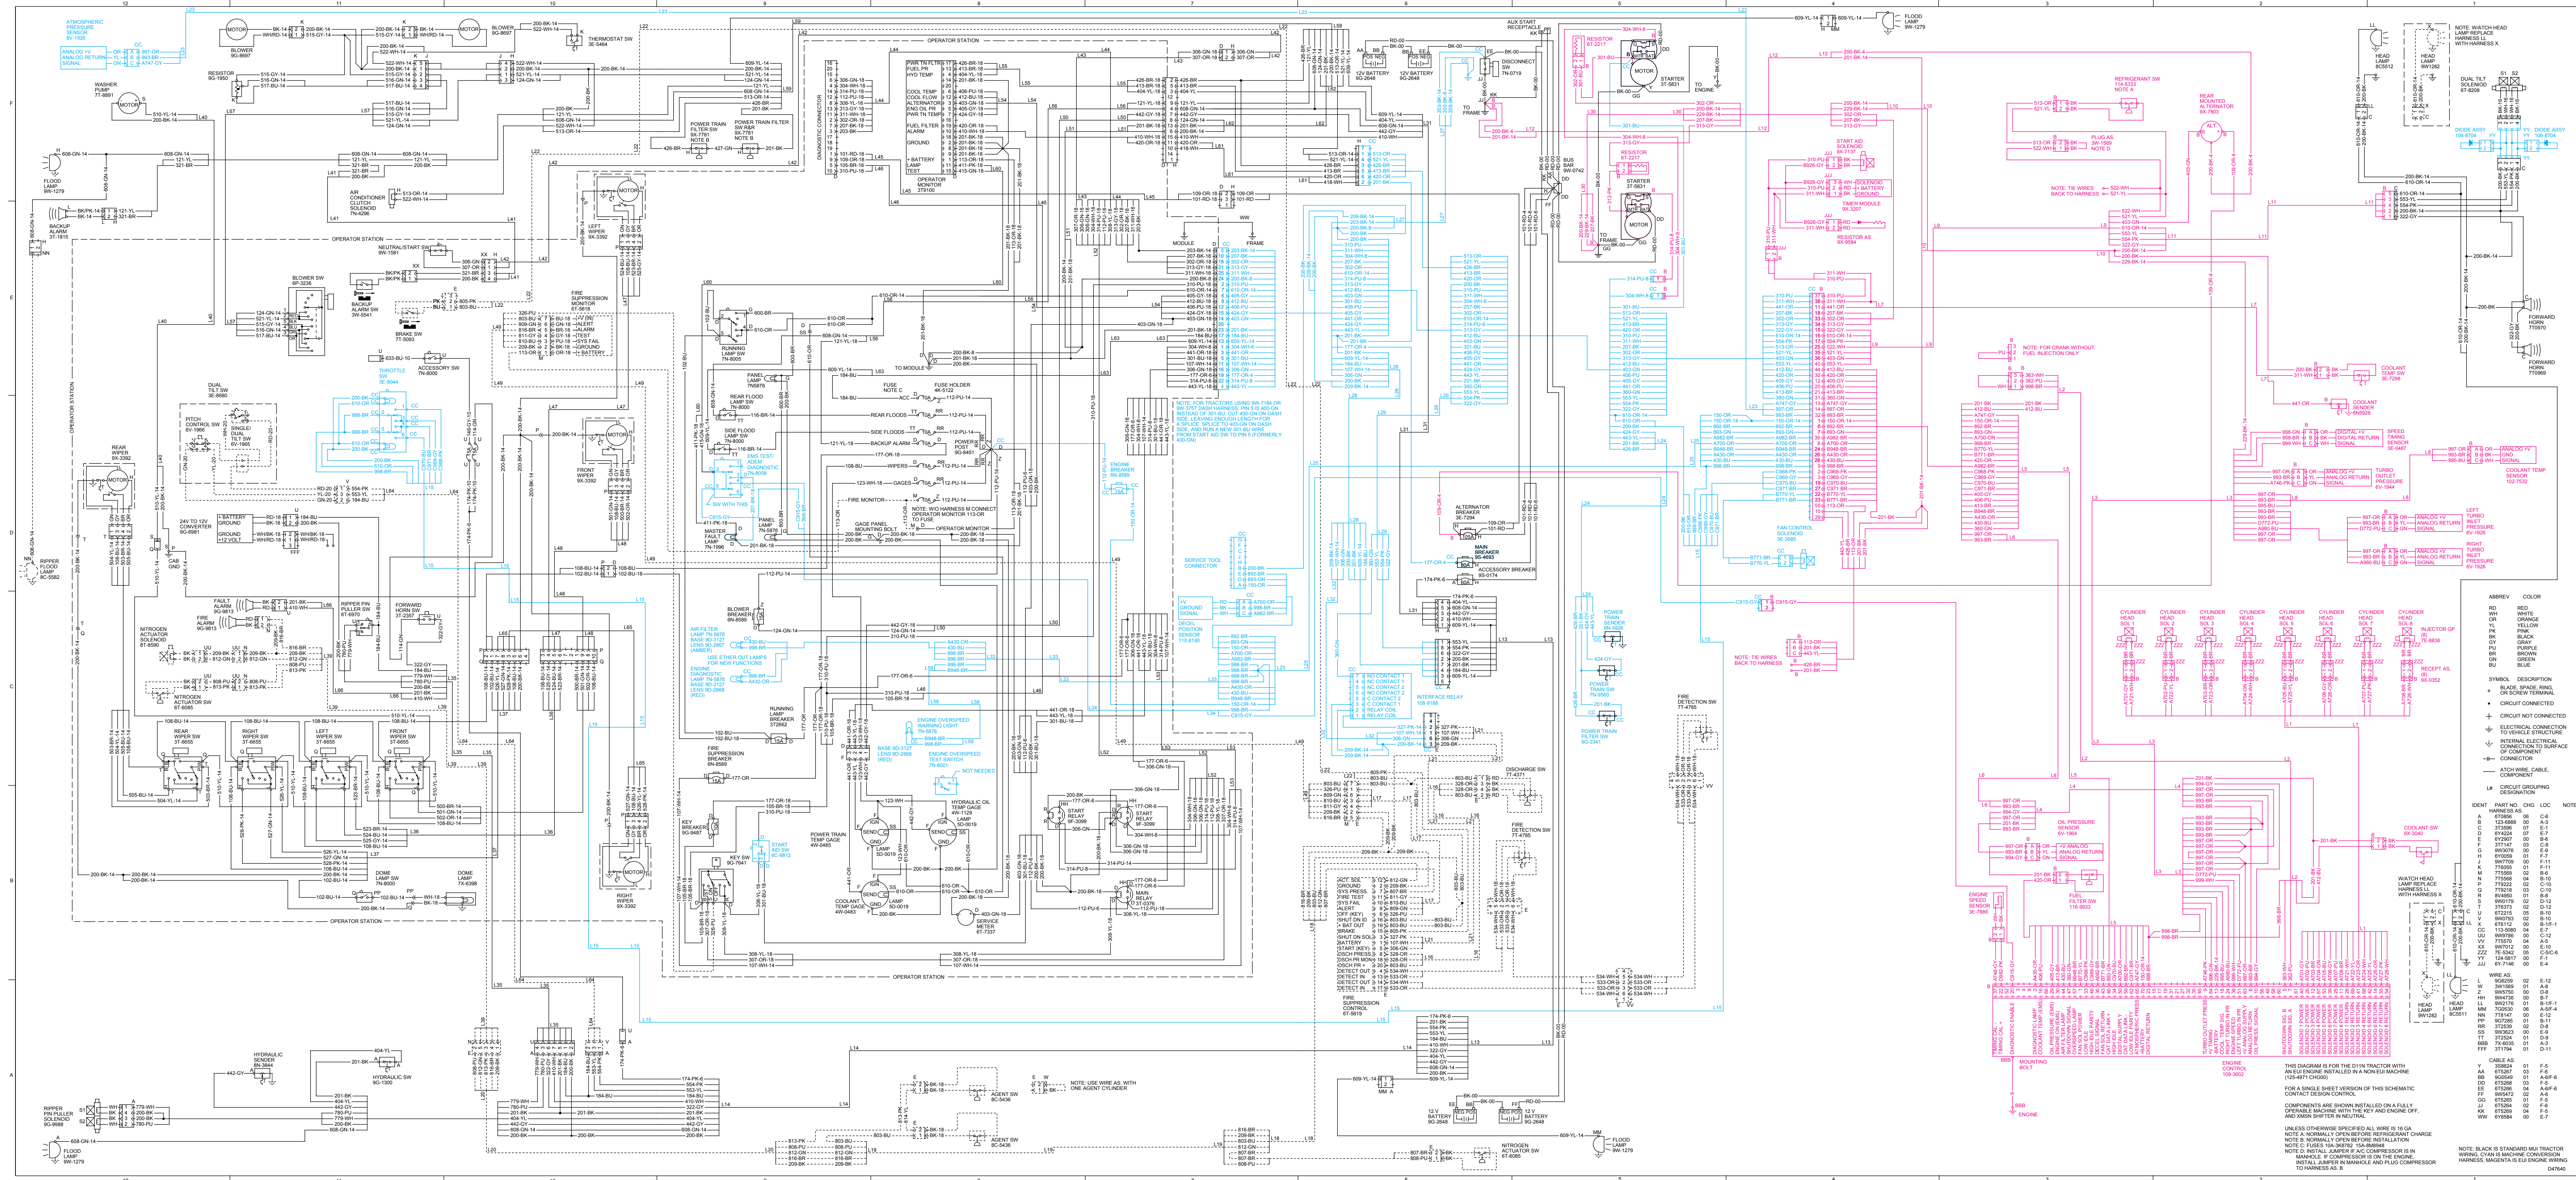

**ABBREVIATION COLOR**

RD	RED
OR	ORANGE
BR	BROWN
PK	PINK
BL	BLACK
PU	PURPLE
GR	GREEN
BU	BLUE

**SYMBOL DESCRIPTION**

- CIRCUIT NOT CONNECTED
- ELECTRICAL CONNECTION TO WIRING STRUCTURE
- INTERNAL ELECTRICAL CONNECTION IN SURFACE CONDUCTOR
- ATCH WIRE CABLE
- CONN. PANEL
- CIRCUIT GROUNDING DESIGNATION

**IDENT WIRE NO. CIRC. LOC. NOTE**

A	103-OR-14	02	01	01	01
B	103-OR-14	02	01	01	01
C	103-OR-14	02	01	01	01
D	103-OR-14	02	01	01	01
E	103-OR-14	02	01	01	01
F	103-OR-14	02	01	01	01
G	103-OR-14	02	01	01	01
H	103-OR-14	02	01	01	01
I	103-OR-14	02	01	01	01
J	103-OR-14	02	01	01	01
K	103-OR-14	02	01	01	01
L	103-OR-14	02	01	01	01
M	103-OR-14	02	01	01	01
N	103-OR-14	02	01	01	01
O	103-OR-14	02	01	01	01
P	103-OR-14	02	01	01	01
Q	103-OR-14	02	01	01	01
R	103-OR-14	02	01	01	01
S	103-OR-14	02	01	01	01
T	103-OR-14	02	01	01	01
U	103-OR-14	02	01	01	01
V	103-OR-14	02	01	01	01
W	103-OR-14	02	01	01	01
X	103-OR-14	02	01	01	01
Y	103-OR-14	02	01	01	01
Z	103-OR-14	02	01	01	01

**THIS DIAGRAM IS FOR THE D14 TRACTOR WITH POWER WINDOW OPTION. FOR NON-PWR WINDOW OPTION, REFER TO 103-OR-14. THIS DIAGRAM IS FOR THE D14 TRACTOR WITH POWER WINDOW OPTION. FOR NON-PWR WINDOW OPTION, REFER TO 103-OR-14.**

**NOTE: BACK UP STANDARD MOUNTING POINTS FOR WIRING. WIRING MUST BE IN THE ENGINE COMPARTMENT.**

**NOTE: INSTALL CAPS ON ALL COMPRESSOR IN MANUAL, IF COMPRESSOR IS ON THE ENGINE.**

**NOTE: UNLESS OTHERWISE SPECIFIED ALL WIRE IS 18 GA. WIRE IS NORMALLY OPEN BEFORE INSTALLATION. NOTE: FUSES ARE LOCATED IN THE ENGINE COMPARTMENT. NOTE: UNLESS OTHERWISE SPECIFIED ALL WIRE IS 18 GA. WIRE IS NORMALLY OPEN BEFORE INSTALLATION. NOTE: FUSES ARE LOCATED IN THE ENGINE COMPARTMENT.**